

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/008082 A2

(51) International Patent Classification⁷: **G01F**
(21) International Application Number:
PCT/IT2003/000427

(74) Agent: **BOBBIO, Giampiero**; c/o Olivetti S.p.A., Intellectual Property Department, via G. Jervis, 77, I-101015 IVREA (IT).

(22) International Filing Date: 8 July 2003 (08.07.2003)

(81) Designated States (*national*): AU, BR, CA, CN, HU, IL, IN, JP, KR, MX, RU, SG, TR, US, YU, ZA.

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data:
TO2002A000601 10 July 2002 (10.07.2002) IT

Declarations under Rule 4.17:

(71) Applicant (*for all designated States except US*):
OLIVETTI I-JET S.P.A. [IT/IT]; Località Le Vieux,
I-11020 Arnad (IT).

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AU, BR, CA, CN, HU, IL, IN, JP, KR, MX, RU, SG, TR, YU, ZA, European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR)*
- *of inventorship (Rule 4.17(iv)) for US only*

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **SCARDOVI, Alessandro** [IT/IT]; c/o Olivetti I-Jet S.p.A., Località Le Vieux,
I-11020 Arnad (IT).

Published:

- *without international search report and to be republished upon receipt of that report*

[Continued on next page]

(54) Title: SYSTEM FOR DETECTING THE LEVEL OF LIQUID IN A TANK

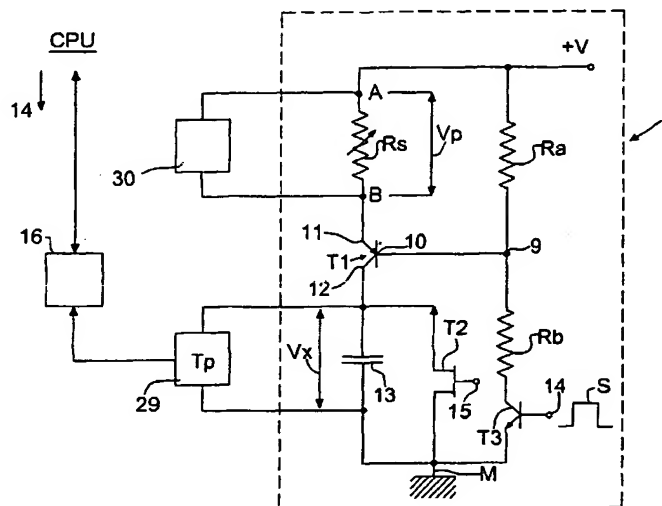

(57) Abstract: The detecting system comprises a detecting circuit (1) made up of a transistor (T1) in current generator configuration, connected in series with a resistance (Rs) and a capacitor (13) of known capacitance (Cx), the resistance Rs representing the resistivity of the liquid existing between two electrodes (5, 6) plunged into the liquid. Thanks to the presence of the capacitor (13), it is possible to detect the liquid level in relation to the integral of the current that charges the capacitor (13), resistance Rs being such as to condition the charge time (Tp) of the capacitor (13). Accordingly, the variations in the voltage drop (Vp) on Rs caused by successive charges of the capacitor (13) with a current of time Tp represent corresponding values of the level of the liquid.

WO 2004/008082 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM FOR DETECTING THE LEVEL OF A LIQUID IN A TANK

Technical field

This invention relates to a system for detecting the level of a liquid in a tank, and more particularly the level of ink contained in the cartridge of an ink jet printhead.

Brief description of the state of the art

Various devices and relative methods are known in the sector art, and in particular in the field of ink jet printers, for detecting the residual ink quantity, or the level of ink in the cartridge of the printhead, the most widely used of which may be divided into the following categories:

devices for detecting the residual quantity of ink by means of float systems;

detecting devices that use the measurement of a rapid variation of the electrical resistance of the ink between two electrodes, when one of these remains uncovered, of the ON – OFF type;

finally, detecting devices that use the measurement of the variation of the resistance of the ink between two electrodes placed in a porous body impregnated with ink.

These devices have drawbacks of different types, such as lack of precision, mechanical failures and jamming for all the float detector types, lack of precision and incorrect measurement of the resistance of the ink

for all the other types of detectors, mainly on account of the fact that the resistance is highly dependant on the temperature and on the composition of the ink.

What is more, the residual ink quantity detecting devices known in
5 the sector art are unsuitable for working in the presence of electrically non-conducting liquids, such as for instance oily liquids and liquids derived from crude oil.

Summary description of the invention

One object of this invention, therefore, is to overcome the drawbacks
10 found in the type of detectors known in the art and classified above.

Another object of the invention is to produce a system for detecting the level of a liquid in a tank in such a way that the indication of the level of the liquid is independent of the influence of parameters, such as temperature, composition of the liquid, in particular an ink, and any errors
15 in the dimensions and position of the detecting electrodes.

Finally a further object of this invention is to produce a system for detecting the level, or quantity of liquid in a tank, filled with an electrically non-conducting liquid.

Therefore in accordance with the stated objects of this invention, a
20 system is proposed for detecting the level of a liquid in a tank, the detecting system comprising:

at least two electrodes (5, 6) extending into the inside of said tank (2), in contact with said liquid, said electrodes (5, 6) being separated by a volume of liquid (8) presenting an own electrical resistance (R_s) variable in function of the level of the liquid in said tank, and influenced by environmental conditions and by physical properties of said liquid,

detecting means (1) electrically connected to said electrodes (5, 6),
and

a control unit (CPU) suitable for controlling said detecting means, characterized as defined in the main claim.

These and other characteristics of the invention will appear more clearly from the following description of a preferred embodiment, provided by way of non-restrictive example, with reference to the figures of the accompanying drawings.

Brief description of the drawings

Figure 1 represents a wiring diagram of the detecting system according to the invention;

figure 2 depicts schematically one of the arrangements of the electrodes inside the ink cartridge;

figure 3 shows a diagram of the standard variation of resistivity of the ink with ambient temperature;

figure 4 represents a different embodiment of the detecting system of fig. 1;

figure 5 represents a version of the device of fig. 1 adapted for dielectric liquids;

5 figure 6 represents schematically the disposition of a pair of capacitive electrodes for dielectric liquids;

figure 7 shows a variant of the diagram of fig. 5.

Detailed description of the invention

Although the discovery according to this invention may be used for
10 measuring the level of any liquid contained in a tank, the description that follows focuses, for simplicity's sake, on an application, certainly non-restrictive, of the system for detecting the level of a liquid used for measuring the ink level of a cartridge 2 (fig. 2) of an ink jet printhead 3, integral with the cartridge 2.

15 As a non-restrictive, illustrative example of the above-mentioned application, reference is made to use of the printhead 3 on slip printing equipment, used at points of sale (POS) in shopping centres, such as that described in the Italian patent application No. TO 2002 000428, filed by the Applicant, which may be consulted for greater details about using the
20 system for detecting the level of a liquid according to this invention.

The ink jet printhead 3 is of a type widely known in the sector art, and is therefore not described in detail, the reader being referred instead to Italian patent no. 1.233.061, for example.

5 The cartridge 2 contains a spongy body 4 of electrically insulating material and provided with high porosity which, when the cartridge is new, is completely impregnated with ink, which is held on the inside by capillarity.

Two metallic electrodes 5 and 6 are attached to a lid 7 of the cartridge 2, located at the opposite end with respect to the printhead 3,
10 and extend inside the spongy body 4; the electrodes 5 and 6 are therefore maintained in contact with the ink contained in the cartridge 2.

The two electrodes 5 and 6 are arranged at a distance from one another, functionally pre-established so as to define between them a volume 8 of ink, which presents a determined electrical resistance R_s to
15 the passage of an electrical current of constant and defined intensity.

Gradually as the ink is consumed by the head 3 for printing, the spongy body 4 empties, the ink inside the spongy body 4 recedes starting from the lid 7, in the direction of the printhead 3. The volume 8 of ink between the electrodes 5 and 6 diminishes, and as a result the resistance
20 R_s increases in value.

In practice, however, the resistance R_s is influenced by other parasitic parameters that modify its value, causing errors during the detection of the level of ink in the cartridge 2, if they are not taken into due consideration. These parasitic parameters are first and foremost the environmental conditions that the cartridge 2 is in at the time the level of ink is measured, and the chemical composition of the ink. The environmental condition that most influences the resistance R_s is temperature. Figure 3 shows a typical trend of the variation of the value of the resistance R_s , or resistivity, upon variation of the ambient temperature. It may be noted that, for the most commonly used types of ink in ink jet printers, in the ambient temperature range from 10°C to 30°C, resistivity of the ink varies on average from 1.6 to 0.8 approximately, once the resistivity at 20°C has been fixed at 1.

The main object of this invention, therefore, is to be able to detect the level of the ink in the cartridge 2, regardless of the influence of the parasitic parameters mentioned above.

With reference to figure 1, the numeral 1 is used to indicate as a whole a detecting circuit, comprising the detecting means according to the invention. The circuit 1 comprises a transistor T1, configured as a current generator, polarized by means of two fixed resistances R_a and R_b , fed with power by a voltage source +V; the point 9 of common

connection of the resistances Ra and Rb is connected to the base 10 of transistor T1.

The emitter 11 of T1 is connected to one end B of the resistance Rs, i.e. it is connected to the corresponding electrode 6 (fig. 2) of the cartridge 2, whereas the other end A of the resistance Rs, corresponding
5 in turn to the electrode 5, is directly connected to the source +V.

In order to render measurement of the level of ink independent of the influence of the parasitic parameters mentioned earlier, according to the invention a capacitor 13, of known and constant capacitance Cx, has
10 been included in the circuit of figure 1. The capacitor 13 is connected between the collector 12 of T1 and the common earth M.

An FET transistor T2 is connected in parallel to the ends of the capacitor 13, its function being to discharge the capacitor 13, after each measurement, in order to re-establish its starting conditions for a new
15 measurement. For this purpose, the transistor T2, normally inactive, is activated by a pulse applied in a known way to the gate 15.

A third transistor T3 is placed in series with the resistances Ra, Rb, between the resistance Rb and the earth M. The transistor T3 is normally inactive, but is activated by means of a signal S generated by the CPU, of
20 predefined duration, as will be described later, and applied to the base 14

of the transistor T3, only when it is necessary to make the transistor T1 conducting, i.e. when the level of ink has to be measured.

Inclusion of the capacitor 13 permits generation of a signal representing the level of liquid, namely of ink in the cartridge 2, no longer proportional to the current flowing through a reference resistance in series with the resistance offered by the ink, as was known in the sector art, for example as in a device described in USA patent no. 5.162.817, but proportional to the integral of the current. This leads to a different form of behaviour of the circuit 1, when it is powered with a constant current I.

In fact, if we indicate with V_p the voltage drop measured on the terminals A, B of the resistance R_s , with V_x the voltage on the terminals of the capacitor 13 of capacitance C_x , we obtain the relation 1):

$$V_x = T_p V_p / C_x R_s \quad 1)$$

in which T_p indicates the duration of the time to charge the capacitor 13 up to a voltage V_x , i.e. the driving time of the circuit 1. However the voltage drop V_p , being proportional to the resistance R_s , will also suffer the variations due to the above-mentioned parasitic parameters, and will not give a true indication if used as a quantity representing the level of ink.

If the relation 1) is interpreted in another way, where the voltage V_x is considered to be constant, the following relation 2), derived from 1), is obtained:

$$V_p = V_x C_x R_s / T_p, \quad 2)$$

5 in which the driving time T_p is now the quantity proportional to R_s .

In other words, by using a certain cartridge 2, and by driving the circuit 1 with a current I until a prefixed voltage V_x is obtained, depending for instance on the dynamics of the A/D conversion equipment 30, a driving time T_{p1} is obtained, that can easily be measured by means of a
10 digital counter 29 and stored in a memory, for instance in a memory 16 (fig. 1, 2) located on board the cartridge itself.

Afterwards, as the ink in the cartridge 2 is gradually used for printing, by subsequently driving the circuit 1 with a pulse of current I of duration equal to the time T_{p1} , corresponding values of the voltage drop V_p may
15 be measured, which will give a true representation of the pattern of the level of the ink as they are no longer affected by the influences of the parasitic parameters, now automatically compensated for by the value of T_{p1} . Therefore in this mode of operation of the circuit 1, just described, the voltage drop on the terminals of the resistance R_s is truly
20 representative of the level of ink contained in the cartridge 2.

Method of measuring the level of liquid

The method of measuring the level of a liquid contained in a tank, and in particular the level of ink in a cartridge 2 of an ink jet printhead 3, is conducted according to the following steps:

step 1): each newly produced cartridge, filled with a certain type of ink, black or colour, is connected to the circuit 1, which is powered with a current I;

step 2): the ambient temperature surrounding the new cartridge is measured;

step 3): the counter 29 is used to measure the driving time T_p used to reach a voltage V_x that is fixed in advance and suitable for the characteristics of the converting/measuring device 30 used for digitizing and measuring the voltages;

step 4): the time T_p measured in step 3) is associated with a standard ambient temperature of 20° and is stored in the non-volatile memory 16 fixed on board the cartridge 2; this measured time T_p represents the maximum value of the level of ink contained in the new cartridge 2;

step 5): in use with the cartridge 2, mounted on printing equipment and connected to the detecting circuit 1, still controlled by the CPU, the ambient temperature of the cartridge during the operating step is measured;

step 6): the detecting circuit 1 is powered with a pulse of current I of duration equal to the driving time T_p , taken from the memory 16, and the voltage drop V_p on the terminals of the resistance R_s is measured, before being converted by the converter 30, connected to the control unit or
5 CPU;

step 7): the measurement of V_p is associated with the temperature of 20° , in such a way as to obtain the corresponding value of the level of ink, converted according to a suitable scale;

step 8): the measurement is repeated as in steps 6) and 7), each
10 time the value of level of the ink in the cartridge 2 needs to be known;

step 9): the cartridge 2 is replaced when a voltage drop V_p is detected on the resistance R_s equal to or less than a previously calculated limit value, indicative of a situation of cartridge empty.

Figure 3 shows the influence of the ambient temperature on the
15 resistance of various inks; the diagram of figure 3 is drawn in dimensionless and normalized form, in which the value 1 on the ordinates corresponds to the resistance of the ink at 20°C .

Figure 4 represents a different embodiment 17 of the detecting circuit
1 of fig. 1, suitable for use with digitizing and measuring equipment
20 having a floating input, i.e. not referred to the earth; in the circuit 17 the resistance R_s and the capacitor 13 are changed over and the transistor

T3 is connected between the +V pole and the resistance Ra; a transistor T4 has been added together with the charging 18 and polarizing 19 resistance of T3; this addition does not affect global operation of the circuit 17.

5 Figure 5 shows a detecting circuit 20 equivalent to that of figure 1, and which therefore works in the same way, suitable for non-conducting, or dielectric, liquids, such as for example liquids used in the chemical industry, liquids derived from crude oil, mineral oils, or vegetable oils, etc.

10 The capacitor 22 represents the capacitance Cx of a pair of electrodes 23 and 24 (fig. 6), facing one another and immersed in the liquid 25, the level of which in a tank 26 has to be measured. The capacitance Cx varies depending on the level of the liquid in the tank 26, as a portion of the electrodes remains uncovered and therefore the dielectric constant which defines the capacitance Cx varies as a result.

15 Finally the circuit 27 of fig. 7 is a detecting circuit equivalent to that of figure 5, in which the resistance Re and the capacitor 22 are changed over, should the voltage drop Ve be measured by floating input equipment, without earth reference.

20 It remains understood that changes, additions or component part substitutions may be made to the system for detecting the level of a liquid

in a tank, according to this invention, without departing from the scope of this invention.

CLAIMS

1. System for detecting the level of a liquid (8) in a tank (2), comprising:

at least two electrodes (5, 6) extending into the inside of said tank (2),
in contact with said liquid, said electrodes (5, 6) being separated by a
5 volume of liquid (8) presenting an own electrical resistance (R_s) variable in
relation to the level of the liquid in said tank (2), and influenced by
environmental conditions and by physical properties of said liquid,

detecting means (1) electrically connected to said electrodes (5, 6), and
powered by a voltage source (+V), and

10 a control unit (CPU) suitable for controlling said detecting means,

characterized in that said detecting means (1) comprise a capacitance
(13) connected in series to said resistance (R_s), and a current generator
(T1) connected in series between said resistance (R_s) and said
capacitance (13), said current generator (T1) being suitable for being
15 activated by said control unit (CPU) for powering said resistance (R_s) and
for charging said capacitance (13) with said current until a predefined
voltage (V_x) is reached on the terminals of said capacitance, during a
corresponding charge time (T_p) representative of the current level of said
liquid in said tank, and

20 **in that** said control unit (CPU) is prearranged for storing said charge
time (T_p) in a memory (16) and for activating at later times said generator

(T1) for a duration equal to said stored charge time (Tp), so that said capacitance (13) is charged with a current such as to produce on said resistance (Rs) a voltage drop (Vp) proportional to the variation of said resistance (Rs) caused by a corresponding variation of the level of said liquid, and independent of said environmental conditions and said physical properties.

2. Detecting system as in claim 1, characterized in that the values of said voltage drop (Vp) equal to or less than said predefined value (Vx) represent with continuity corresponding levels of said liquid equal to or less than said maximum level.

3. Detecting system as in claim 1 or 2, characterized in that said environmental conditions include the temperature of said liquid.

4. Detecting system as in one of the previous claims, characterized in that said physical properties comprise the chemical composition of said liquid.

5. Detecting system as in one of the previous claims, characterized in that said tank consists of a cartridge (2) for the ink of an ink jet printhead (3), said cartridge (2) being filled with a porous body (4) impregnated with said ink.

6. Detecting system as in claim 5, characterized in that said electrodes (5, 6) are inserted in said porous body (4), and that said electrical resistance (Rs) corresponds to the resistance of a volume of said ink (8) between said

electrodes (5, 6), and variable in relation to the consumption of ink by said printhead (3).

7. Detecting system as in claim 1 or 6, characterized in that said detecting means (1) comprise a non-volatile memory (M, 16) suitable for storing said charge time (T_p) representative of the maximum level of said liquid in said tank (2).

8. Detecting system according to claim 7, characterized in that said non-volatile memory (16) is integral with said cartridge (2).

9. Detecting system as in one of the previous claims, characterized in that said detecting means (1) comprise a first transistor (T1) connected in series between said resistance (R_s) and said capacitor (13) and selectively polarized by a pair of fixed resistances (R_a , R_b), powered by said voltage source (+V), and a second transistor (T3), normally off, connected in series to said pair of resistances (R_a , R_b), said second transistor (T3) being activated by a signal (S) of duration equal to said representative charge time (T_p), so that said first transistor (T1) is actuated for charging said capacitor (13) with a current, such as to produce on said resistance (R_s) a voltage drop (V_p) representative of the level of said ink.

10. System for detecting the level of a liquid in a tank (26), comprising:

at least two electrodes (23,24) extending into the inside of said tank (26), in contact with said liquid, said electrodes (23, 24) constituting a

capacitor (22), the capacitance (Cx) of which is variable in relation to the level of the liquid in said tank (26), and influenced by environmental conditions and by physical properties of said liquid,

detecting means (27) electrically connected to said electrodes (23,24),

5 and

a control unit (CPU) suitable for controlling said detecting means,

characterized in that said detecting means (27) comprise a resistance

(Re) connected in series to said capacitor (22) and a current generator (T1)

connected in series between said resistance (Re) and said capacitor (22),

10 said current generator (T1) being suitable for being activated by said control

unit (CPU) for powering said resistance (Re) and for charging said

capacitance (Cx) with said current until a predefined voltage (Ve) is

reached on the terminals of said resistance (Re), during a corresponding

charge time (Tp), representative of the current level of said liquid in said

15 tank (26), and

in that said control unit (CPU) is prearranged for storing said charge

time (Tp) in a memory (16) and for activating at later times said generator

(T1) for a duration equal to said stored charge time (Tp), so that said

capacitance (22) is charged with a current such as to produce on said

20 resistance (Re) a voltage drop (Ve) proportional to the variation of said

capacitance (Cx) caused by a corresponding variation of the level of said

liquid, and independent of said environmental conditions and said physical properties.

11. Detecting system as in claim 10, characterized in that said liquid is dielectric, having a defined dielectric constant and influenced by said environmental conditions and by said physical properties.

12. Detecting system as in claim 11, characterized in that said liquid is a derivative of crude oil.

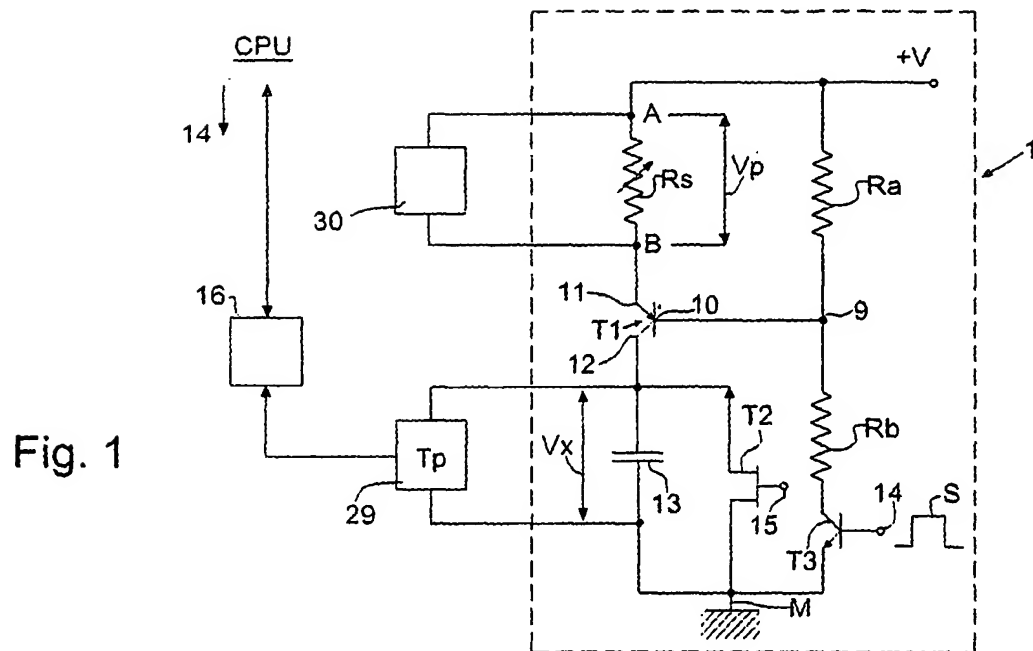


Fig. 1

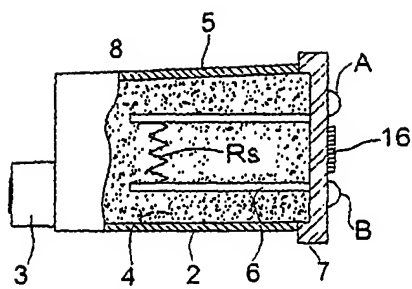


Fig. 2




Fig. 6

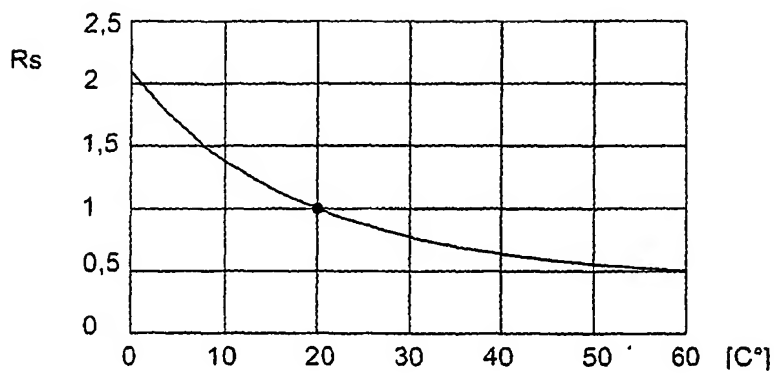


Fig. 3

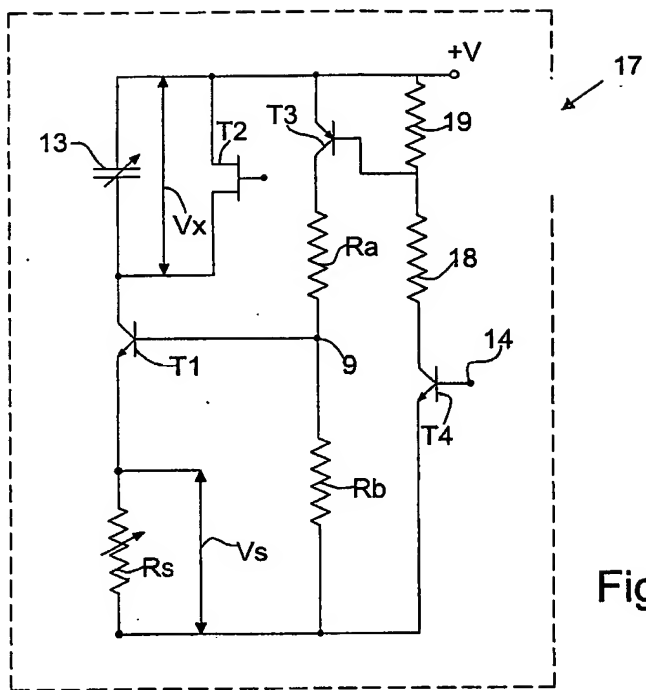


Fig. 4

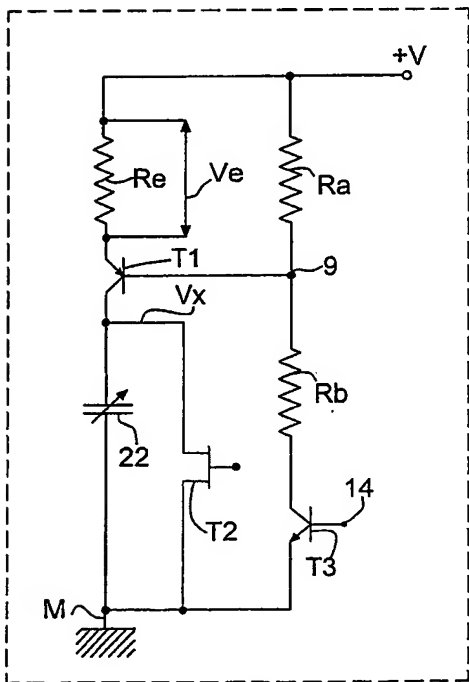


Fig. 5

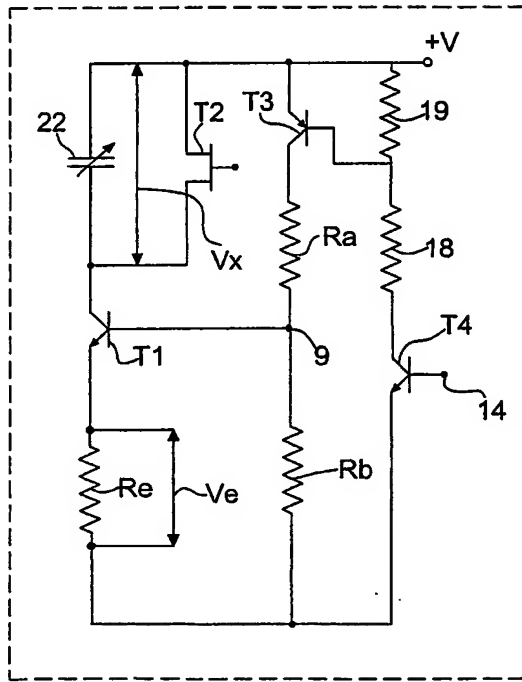


Fig. 7